**Pressure Range**

From: 2.50 bar g. (36.25 psi g.)
To: 21.00 bar g. (304.50 psi g.)

**Temperature Range**

-15 °C to 200 °C (subject to seal material)

**Flow Area**

181.46 mm² (15.20 mm inlet bore diameter)

**Connections**

Inlet: 3/4" to 1" BSP, BSPT, NPT

**Seal Materials**

Viton®

GA 81815

		GA 81815
1	BODY	BRASS CZ121
2	SEAL	VITON
3	VALVE DISC	BRASS CZ121
4	SPINDLE	ST. STEEL
5	SPRING	ST. STEEL 1.4310 (302)
6	ADJUSTER	BRASS CZ121
7	LIFTING CAP	BRASS CZ121
8	NAME PLATE	ALUMINIUM ALLOY
9	WIRE & SEAL	ST. STEEL & LEAD


Notes

- Relieving pressure is set pressure +10%
- Reseating pressure is set pressure -10%

Approvals

- TÜV Germany (AD-Merkblatt A2)
- BS EN ISO 4126-1
- PED 97/23/EC

Discharge Capacity's

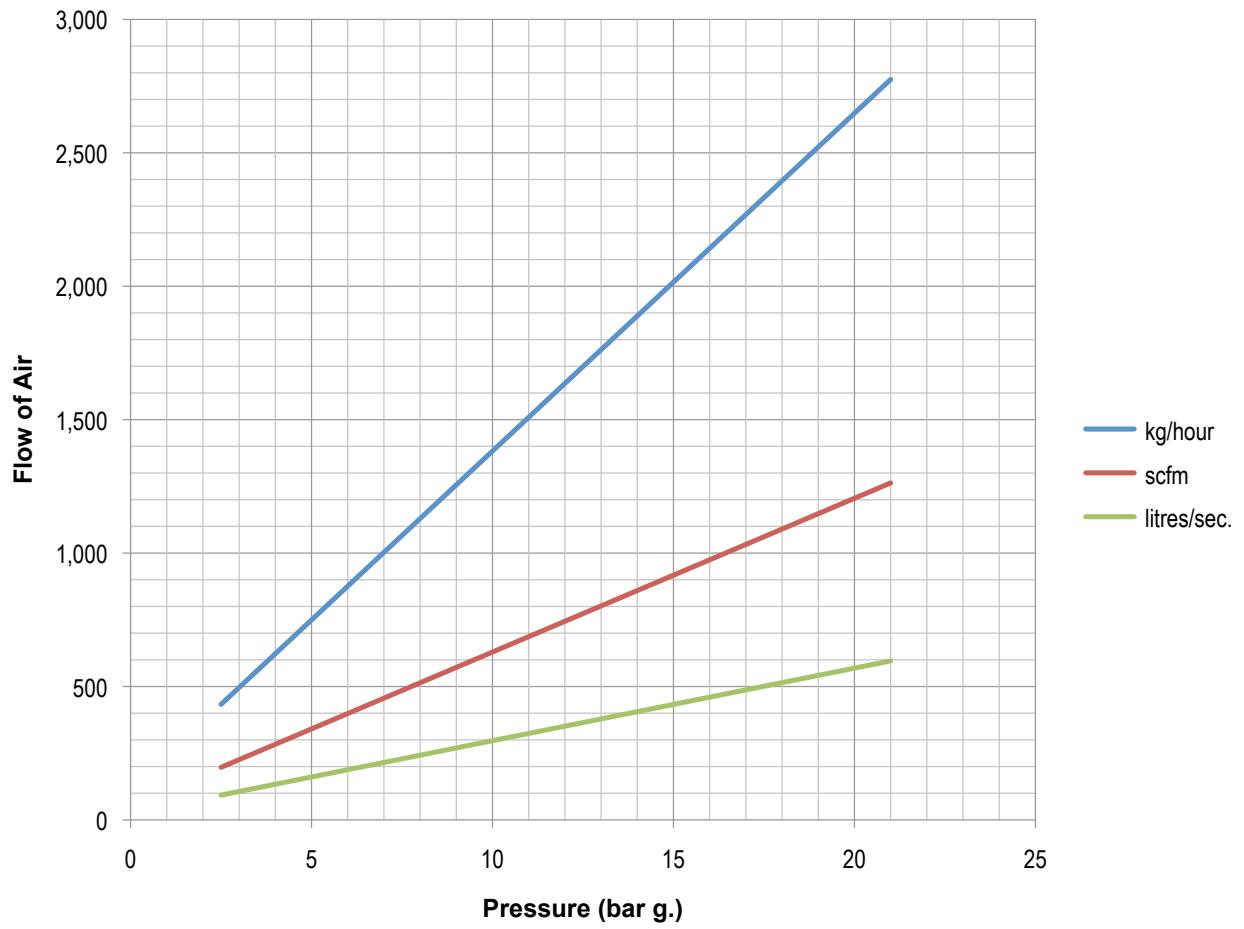

For assistance in sizing a valve to your specifications please contact the Seetru technical sales desk.

Alternate Fitting

