


## 0449 - DBLE FEMALE BSPP,W/THREADED EXHAUST PANEL MOUNTABL

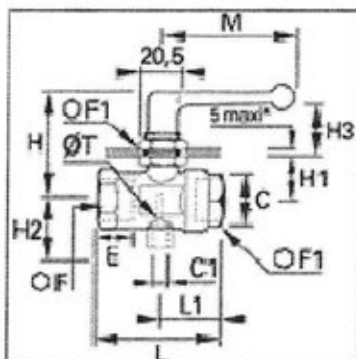

Allows collection of vented fluids through a threaded vent port.

- full flow
- optimum sealing due to compensating "O" rings
- excellent resistance to scaling due to ball seal configuration

|                                 |   |
|---------------------------------|---|
| <b>maximum working pressure</b> | 20 bar<br>2 MPa<br>290 psi                    |
| <b>working temperature</b>      | -20 to 80 °C<br>-4 to 176 °F<br>253 to 353 °K |
| <b>adjustment screw</b>         | NICKEL PLATED<br>BRASS                        |
| <b>body</b>                     | NICKEL PLATED<br>BRASS                        |
| <b>retaining nut</b>            | NICKEL PLATED<br>BRASS                        |
| <b>stem</b>                     | BRASS   |
| <b>stem seal</b>                | NBR   |
| <b>'O'-rings</b>                | NBR   |
| <b>ball seal</b>                | NBR   |
| <b>handle</b>                   | ZAMAK   |

| Part No       | C    | C1     | E (mm) | F (mm) | F1 (mm) | H (mm) | H1 (mm) | H2 (mm) | H3 (mm) | L (mm) | L1 (mm) | M (mm) | ØT (mm) |
|---------------|------|--------|--------|--------|---------|--------|---------|---------|---------|--------|---------|--------|---------|
| LE-0449 07 13 | G1/4 | M5x0,8 | 12     | 24     | 27      | 50     | 20      | 17      | 21      | 59     | 31      | 69     | 2.5     |
| LE-0449 10 17 | G3/8 | M5x0,8 | 12     | 24     | 27      | 50     | 20      | 17      | 21      | 59     | 31      | 69     | 2.5     |
| LE-0449 13 21 | G1/2 | G1/8   | 15     | 27     | 27      | 52     | 23      | 24      | 21      | 67     | 34      | 69     | 4       |