


180 Cross, equal, ISO/EN C1

* Available as long as our stock will last

EN		Dim. [inch]	Code	a [mm]	z [mm]	
.	B	1/4	770 180 102	21	11	
.	G	1/4	770 180 202	21	11	
.	B	5/8	770 180 103	25	15	
.	G	5/8	770 180 203	25	15	
.	B	1/2	770 180 104	28	15	
.	G	1/2	770 180 204	28	15	
.	B	3/4	770 180 105	33	18	
.	G	3/4	770 180 205	33	18	
.	B	1	770 180 106	38	21	
.	G	1	770 180 206	38	21	
.	B	1 1/4	770 180 107	45	26	
.	G	1 1/4	770 180 207	45	26	
.	B	1 1/2	770 180 108	50	31	
.	G	1 1/2	770 180 208	50	31	
.	B	2	770 180 109	58	34	
.	G	2	770 180 209	58	34	
.	B	2 1/2	770 180 110	69	42	
.	G	2 1/2	770 180 210	69	42	
.	B	3	770 180 111	78	48	
.	G	3	770 180 211	78	48	
*	B	4	770 180 112	96	60	
*	G	4	770 180 212	96	60	

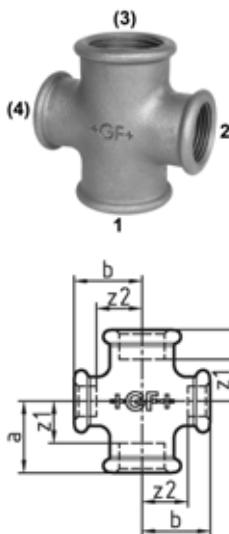

180 Cross, reducing, ISO/EN C1

EN		Dim. (1-2) [inch]	Code	a [mm]	b [mm]	z1 [mm]	z2 [mm]	
.	B	5/8 - 1/2	770 180 115	30	31	15	18	
.	G	5/8 - 1/2	770 180 215	30	31	15	18	
.	B	1 - 1/2	770 180 116	32	34	15	21	
.	G	1 - 1/2	770 180 216	32	34	15	21	
.	B	1 - 3/4	770 180 117	35	36	18	21	
.	G	1 - 3/4	770 180 217	35	36	18	21	
.	B	1 1/4 - 1	770 180 118	40	42	21	25	
.	G	1 1/4 - 1	770 180 218	40	42	21	25	
.	B	1 1/2 - 1	770 180 120	42	46	23	29	
.	G	1 1/2 - 1	770 180 220	42	46	23	29	
-	B	2 - 1	770 180 121	44	52	20	35	
-	G	2 - 1	770 180 221	44	52	20	35	