


# SQUARE PLUG

Ra	0.2	▽▽▽▽
▽	1.6	▽▽▽
▽	6.3	▽▽
▽	25	▽
▽	~	~


GENERAL TOLERANCE	0.5-5 ± 0.1
	6-30 ± 0.2
	31-120 ± 0.3
	121-320 ± 0.5
	321-1000 ± 0.8

HAITIMA CORPORATION  
 P.O. BOX 34-36 TAIPEI  
 Tel:+886-2-26585800  
 E-mail:haitima@seednet.tw  
 TAIWAN R.O.C. www.haitima.com.tw  
 F.o.x:+886-2-26582266

1/8"~1/4"

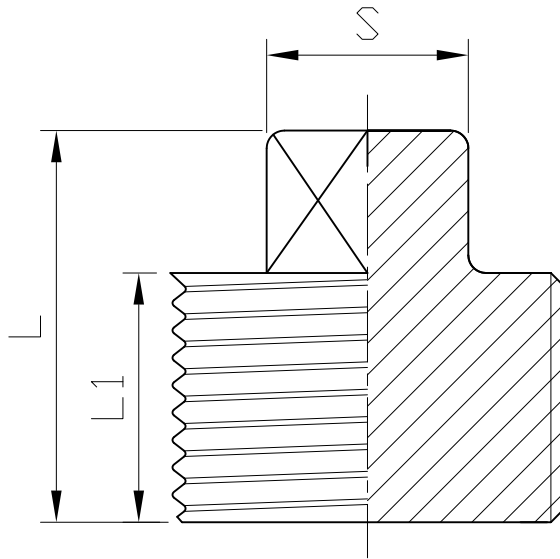

3/8"~4"

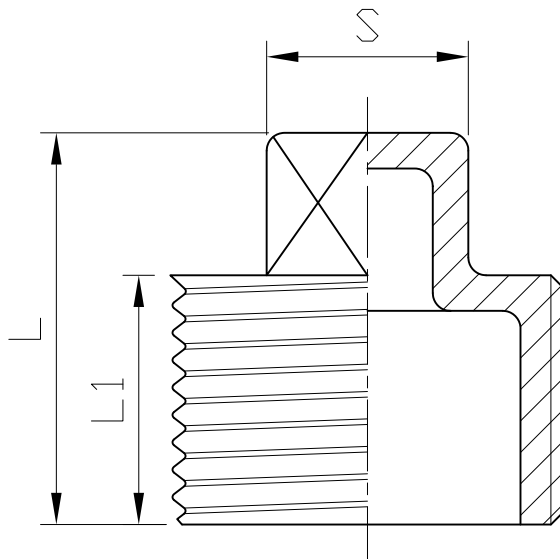

SIZE	L1		L		S	
	mm	in	mm	in	mm	in
1/8"	10.8	0.43	18	0.71	7.2	0.28
1/4"	11.6	0.46	19.6	0.77	8.1	0.32
3/8"	12	0.47	19.8	0.78	9.8	0.39
1/2"	14.7	0.58	24.8	0.98	13.2	0.52
3/4"	15.6	0.61	26.5	1.04	16	0.63
1"	19.6	0.77	33	1.3	19.1	0.75
1-1/4"	20.2	0.8	34.9	1.37	22	0.87
1-1/2"	19.7	0.78	34.5	1.36	25.1	0.99
2"	22.7	0.89	38.9	1.53	28.9	1.14
2-1/2"	26.7	1.05	46.5	1.83	39	1.54
3"	26.8	1.06	47	1.85	44	1.73
4"	30.7	1.21	52.5	2.07	58.2	2.29

Tolerance: ± 0.5mm(1/8"~2")  
 ± 0.8mm(2-1/2"~4")

△			
△			
△			
Revise	Description	Date	Approve
DRAWING NO. <b>F16</b>		<b>-08</b>	



**HAITIMA CORPORATION**  
 Ball Valves & Pipe Fittings

CHECK BY	DRAWING BY	DATE	SPECIFICATION	Square Plug
	<i>Dune</i>	May.19.2008	MATERIAL	304/316
			PROCESS/Nr.	
			UNIT / SCALE	mm

