
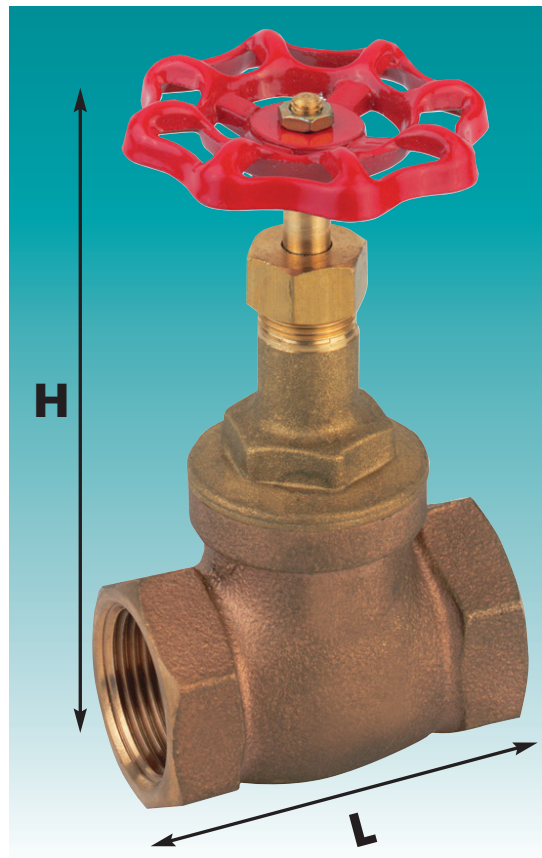



Globe Valves - Gunmetal/Brass

- A range of globe valves designed to open and close quickly for positive shut-off and for regulating purposes.
- Threaded BSP parallel/Teflon Disk/Rising Stem/Screwed-in Bonnet Handwheel operation.
- Manufactured in accordance with BS 5154 PN 20 Series B. Test Pressures (Hydraulic): Shell 30 bar. Seat 22 bar.

 **Temperature Ranges:**
at 20 bar:
 -10°C to +100°C
at 9 bar:
 +180°C



Type 6062



		L	H	kg
GBV-12	1/2"	58	97	0.32
GBV-34	3/4"	70	109	0.56
GBV-1	1"	84	127	0.80
GBV-114	1.1/4"	92	149	1.30
GBV-112	1.1/2"	107	158	1.56
GBV-2	2"	126	174	2.65