



TRAILER BRAKE COUPLING (CARBON STEEL) ISO5676 STANDARD

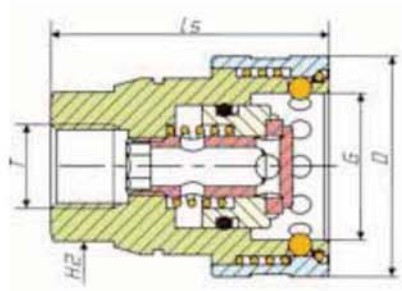

Art. No.	Size	Ls	D	G	H2	T
HFSFC6518	M18x1.5	57	45	30	27	M18x1.5
HFSFC6522	M22x1.5	57	45	30	27	M22x1.5
HFSFC6538	06SF	57	45	30	27	3/8BSP
HFSFC6512	08SF	57	45	30	27	1/2BSP




Art. No.	Size	B	C	G	H1	T
HFSFP6518	M18x1.5	51	23	30	32	M18x1.5
HFSFP6522	M22x1.5	51	23	30	32	M22x1.5
HFSFP6512	08SF	43	15	30	32	1/2BSP

APPLICATIONS:

Trailer Brake Couplings are used to connect the hydraulic braking system of tractors to their trailers. The male coupling is normally panel mounted on the tractor and is available with metric and BSP threads.

PERFORMANCE

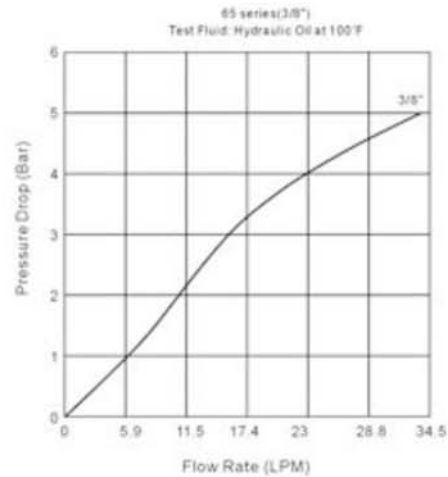

INTERCHANGE

FASTER FV SERIES, HOLMBURY TB SERIES

TEMPERATURE RANGE

-25°C+120°C/-13°F+250°F

With standard seals: Buna-N(Nitrile)

On request seals: Viton, Neoprene, EPDM or other seals.

MAX. WORKING PRESSURE

M18X1.5 :220BAR

M22X1.5 :220BAR

3/8" :220Bar

1/2" :220Bar

MATERIAL

Coupler Body :STEEL, TRIVALENT PLATED

Valve :STEEL, POPPET TYPE

Springs :55CrSi

Locking O-Ring :55CrSi

Balls :GCr15

Seals :Buna-N(Nitrile)

Back-Up Ring :PTFE

Surface treatment :Zinc plating and Cr 3⁺ Passivation

or Yellow Passivation

ATTENTION:

Only plug and socket with the same thread fit together.