



CADDY® 250 MACROFIX M8/M10


2 screw pipe clip with M8 boss/M10

- EPDM rubber insulation for sound reduction compliant with DIN 4109
- M6 multifunction screw with hexagonal combination head (slot & crosshead), c/w retaining washer
- Surface finish: electro zinc plated

N°	Ø "	d mm	B x S mm	Sc x L			kg/1
596460	1/4	12-15	20x1,5	M6x20	1000	100	0,05
596470	3/8	15-19	20x1,5	M6x20	1000	100	0,06
596480	1/2	20-24	20x1,5	M6x20	1000	100	0,06
596490	3/4	25-30	20x1,5	M6x20	1000	100	0,07
596500	1	32-37	20x1,5	M6x20	1000	100	0,08
596510	1 1/4	40-45	20x1,5	M6x25	1000	50	0,10
595859		44-49	20x2,0	M6x25	1300	50	0,10
595860	1 1/2	48-53	20x2,0	M6x25	1300	50	0,10
595870		54-58	20x2,0	M6x25	1300	50	0,10
595880	2	59-63	20x2,0	M6x25	1300	50	0,11
595885		62-64	20x2,0	M6x25	1300	50	0,13
596450		68-73	20x2,0	M6x25	1300	25	0,19
595890	2 1/2	75-80	20x2,0	M6x25	1300	25	0,20
595900		82-86	20x2,0	M6x25	1300	25	0,20
595910	3	89-91	20x2,0	M6x25	1300	25	0,21
595920		95-103	23x2,5	M6x25	1300	25	0,22
595930	4	108-116	23x2,5	M8x25	2200	25	0,24
595940		121-127	23x2,5	M8x25	2200	25	0,30
595980		129-135	23x2,5	M8x25	2200	25	0,31
595950	5	135-141	23x2,5	M8x25	2200	25	0,32
595960		159-162	23x2,5	M8x25	2200	25	0,35
595970	6	165-168	23x2,5	M8x25	2200	25	0,37
595971		198-202	25x3,0	M8x25	2500	10	0,37
595972		210-215	25x3,0	M8x25	2500	10	0,46
595973	8	216-220	25x3,0	M8x25	2500	10	0,48
595990		225	30x3,0	M8x25	2700	10	0,50
595991		250	30x3,0	M8x25	2700	10	0,52
595992		274-280	30x3,0	M8x25	2700	10	0,54
595993		315	30x3,0	M8x25	2700	10	0,56



- steel profile (B x S)
- for pipe diameter from 12 - 315 mm
- Temperature rating from -50°C up to +110°C
- fire rating B2 acc. to DIN 4102

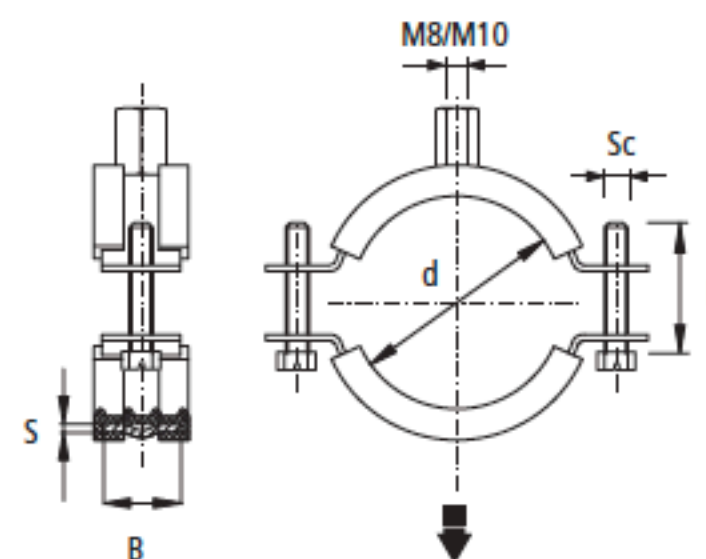



CADDY® 243 SUPER FIX M8/M10

one piece pipe clip with M8/M10 combi boss

- easy to install locking mechanism
- EPDM rubber insulation for sound reduction compliant with DIN 4109
- Cylinder head screw M6 (+ 101mm = M8) with combination head (slot & crosshead)
- Surface finish: electro zinc plated
- steel profile (B x S)
- for pipe diameter from 12 - 114 mm
- Temperature rating from -50°C up to +110°C
- fire rating B2 acc. to DIN 4102



N°	Ø "	d mm	B x S mm	Sc x L			kg/1
400063	1/4	12-14	20x1,5	M6x25	1000	150	0,05
400064	3/8	15-19	20x1,5	M6x25	1000	150	0,05
400065	1/2	21-23	20x1,5	M6x25	1000	100	0,06
400066	3/4	26-28	20x1,5	M6x25	1000	100	0,07
400067	1	32-35	20x1,5	M6x25	1000	75	0,07
400068	1 1/4	40-43	20x1,5	M6x30	1000	50	0,09
400069		44-49	20x1,5	M6x30	1300	50	0,09
400070	1 1/2	48-52	20x1,5	M6x30	1300	50	0,10
589350		54-58	20x2,0	M6x30	1300	50	0,11
400071	2	57-61	20x2,0	M6x30	1300	50	0,12
400072		63-67	20x2,0	M6x30	1300	50	0,13
400073		70-73	20x2,0	M6x35	1300	50	0,17
400074	2 1/2	74-80	20x2,0	M6x35	1300	50	0,18
400075	3	83-91	20x2,0	M6x35	1300	50	0,20
400076		101-106	23x2,5	M8x40	2200	25	0,32
400077	4	108-114	23x2,5	M8x40	2200	25	0,33

