


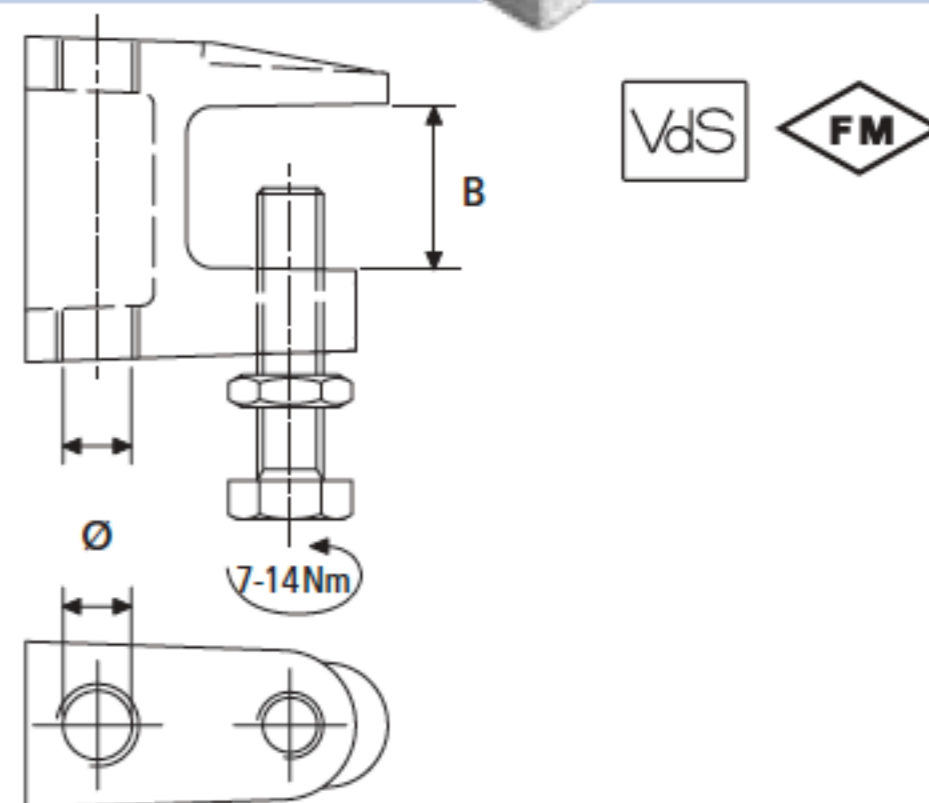
TKN

Beam Clamp

- to fix on to beams without welding or drilling
- compact cast body
- VdS and FM approved
- plain or thread impression
- hollow pointed bolt for better grip
- Surface finish: electro zinc plated




N°	Ø	B mm	VdS	FM	P		kg/1
389500	9	18	VdS	-	1	100	0,09
386810	M8	18	VdS	-	1	100	0,09
389510	11	18	VdS	FM	1	100	0,15
386820	M10	20	VdS	FM	1	100	0,15
389520	13	26	VdS	FM	1	80	0,17
386830	M12	26	VdS	FM	1	80	0,17
389505	17	26	VdS	FM	1	50	0,32



CA

drop in anchor

- with internal thread
- FM & VdS approved
- surface finish: zinc chromate


N ^o	Ø	M mm	L mm	VdS	FM	P		kg/1
593180	8	M6	30	-	-	1	100	0,01
593190	10	M8	30	VdS	-	1	100	0,02
593200	12	M10	40	VdS	FM	1	50	0,03
400415	15	M12	50	VdS	FM	1	50	0,04
400416	20	M16	65	VdS	FM	1	50	0,05



TCA/LA

Hammer in tool for drop in anchor

- For anchor type CA & LCA
- Surface finish: electro zinc plated

N ^o	P		kg/1
593150	1	1	0,20
593160	1	1	0,22
593170	1	1	0,24
400420	1	1	0,25
400421	1	1	0,30

