

CADDY®**CADDY® SUPERKLIP****Grey RAL 7035**

Nº	Description	Ø mm	Certified	Width mm	Height mm	Hole Ø mm		
389001	CADDY SUPERKLIP 12MM G	11,8 - 14,3	KIWA	14,5	30,0	3,5	185 N	100
389002	CADDY SUPERKLIP 15MM G	14,3 - 16,8	KIWA	14,5	30,0	3,5	200 N	100
389003	CADDY SUPERKLIP 17MM G	16,8 - 19,5	KIWA	16,0	35,4	4,0	220 N	100
389004	CADDY SUPERKLIP 20MM G	19,5 - 21,8	KIWA	16,3	39,4	4,0	235 N	100
389005	CADDY SUPERKLIP 22MM G	21,8 - 24,8	KIWA	16,5	40,9	4,0	250 N	100
389006	CADDY SUPERKLIP 25MM G	24,8 - 27,8	KIWA	17,0	45,1	4,5	285 N	50
389007	CADDY SUPERKLIP 28MM G	27,8 - 31,2	KIWA	17,0	48,9	4,5	300 N	50
389008	CADDY SUPERKLIP 32MM G	31,2 - 35,5	KIWA	17,5	54,4	4,5	340 N	50
389009	CADDY SUPERKLIP 36MM G	35,5 - 39,5		18,0	59,4	4,5	360 N	50
389011	CADDY SUPERKLIP 40MM G	39,5 - 43,5	KIWA	19,5	64,2	4,5	380 N	25
389012	CADDY SUPERKLIP 47MM G	46,5 - 50,5		19,5	72,8	4,5	435 N	25
389013	CADDY SUPERKLIP 51MM G	50,5 - 55,5	KIWA	20,0	78,7	4,5	470 N	25
389014	CADDY SUPERKLIP 59MM G	58,5 - 64,0		21,0	88,2	4,5	530 N	20

**White RAL 9010**

Nº	Description	Ø mm	Certified	Width mm	Height mm	Hole Ø mm		
389021	CADDY SUPERKLIP 12MM W	11,8 - 14,3	KIWA	14,5	30,0	3,5	185 N	100
389022	CADDY SUPERKLIP 15MM W	14,3 - 16,8	KIWA	14,5	30,0	3,5	200 N	100
389023	CADDY SUPERKLIP 17MM W	16,8 - 19,5	KIWA	16,0	35,4	4,0	220 N	100
389024	CADDY SUPERKLIP 20MM W	19,5 - 21,8	KIWA	16,3	39,4	4,0	235 N	100
389025	CADDY SUPERKLIP 22MM W	21,8 - 24,8	KIWA	16,5	40,9	4,0	250 N	100
389026	CADDY SUPERKLIP 25MM W	24,8 - 27,8	KIWA	17,0	45,1	4,5	285 N	50
389027	CADDY SUPERKLIP 28MM W	27,8 - 31,2	KIWA	17,0	48,9	4,5	300 N	50
389028	CADDY SUPERKLIP 32MM W	31,2 - 35,5	KIWA	17,5	54,4	4,5	340 N	50
389029	CADDY SUPERKLIP 36MM W	35,5 - 39,5		18,0	59,4	4,5	360 N	50
389031	CADDY SUPERKLIP 40MM W	39,5 - 43,5	KIWA	19,5	64,2	4,5	380 N	25
389032	CADDY SUPERKLIP 47MM W	46,5 - 50,5		19,5	72,8	4,5	435 N	25
389033	CADDY SUPERKLIP 51MM W	50,5 - 55,5	KIWA	20,0	78,7	4,5	470 N	25
389034	CADDY SUPERKLIP 59MM W	58,5 - 64,0		21,0	88,2	4,5	530 N	20




**Yellow RAL 1021**

Nº	Description	Ø mm	Certified	Width mm	Height mm	Hole Ø mm		
389041	CADDY SUPERKLIP 28MM Y	27,8 - 31,2	KIWA	17,0	48,9	4,5	300 N	50
389042	CADDY SUPERKLIP 32MM Y	31,2 - 35,5	KIWA	17,5	54,4	4,5	340 N	50
389043	CADDY SUPERKLIP 40MM Y	39,5 - 43,5	KIWA	19,5	64,2	4,5	380 N	25

**Accessories: Nut**

Nº	Description	
389051	CADDY SUPERKLIP NUT M6	100
389052	CADDY SUPERKLIP NUT M8	100

- Pushing the tube into the clamp closes and locks the pipe clamp
- Fasten with either wood screw, dual threaded screw with or without collar, nail with collar or threaded bolt
- Premium grade Polyamide PA6
- Recyclable
- Colour:
Grey RAL 7035
White RAL 9010
Yellow RAL 1021
- KIWA certified
- Age resistant, UV resistant, suitable for outdoor applications
- Oil and petrol resistant
- Temperature rating
- 40°C to 80°C

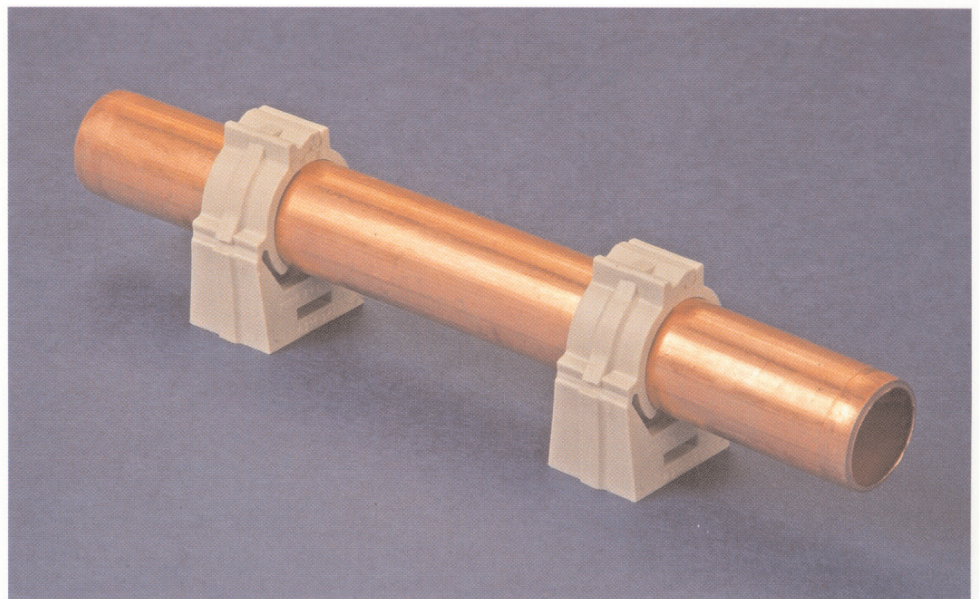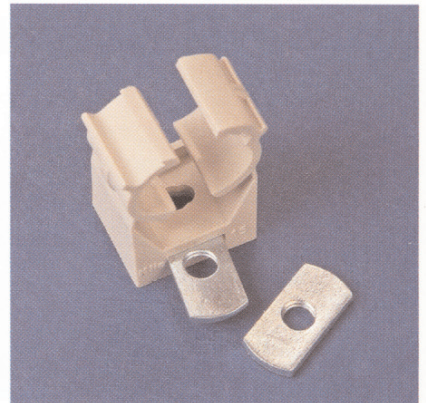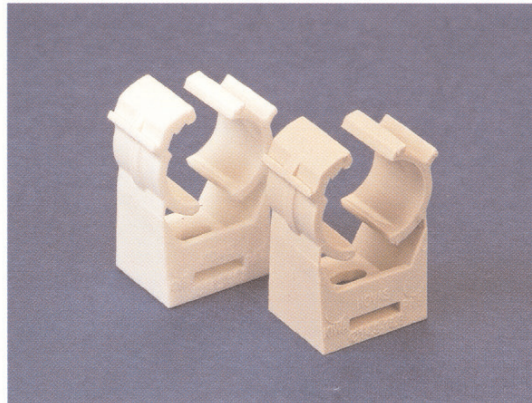

The CADDY® SUPERKLIP is a universally applicable pipe clamp with KIWA Certification that is suitable for both indoor as well as outdoor applications. It comes in 3 different colours, grey, white and yellow to match the environment and/or the pipe. These pipe clamps hold pipes from 11,8 mm (1/4") to 64mm (2").

There is a clearance hole that facilitates easy fixing by wood or threaded screw, but this is only one option to mount these pipe clamps.

With the optional CADDY® SUPERKLIP NUT, that can be inserted in the nut slot, the pipe clamps can be fastened to all established M6 or M8 thread

applications like dual sided screw with or without collar, nail with collar or threaded bolt. In addition the clamps can be combined with all CADDY Clips which come with an M6 thread.

The pipe clamp closes itself when the tube is inserted. So installation is very easy, just push in the pipe and it is fixed.

The use of premium grade Polyamide PA6 makes the CADDY® SUPERKLIP resistant against environmental stress. The pipe clamp is resistant against ageing, UV radiation, oil and petrol and allows the material to be recycled. The pipe clamp can be exposed to a temperature range of -40 °C to 80 °C.

