


Fibreglass Platform Step Ladder

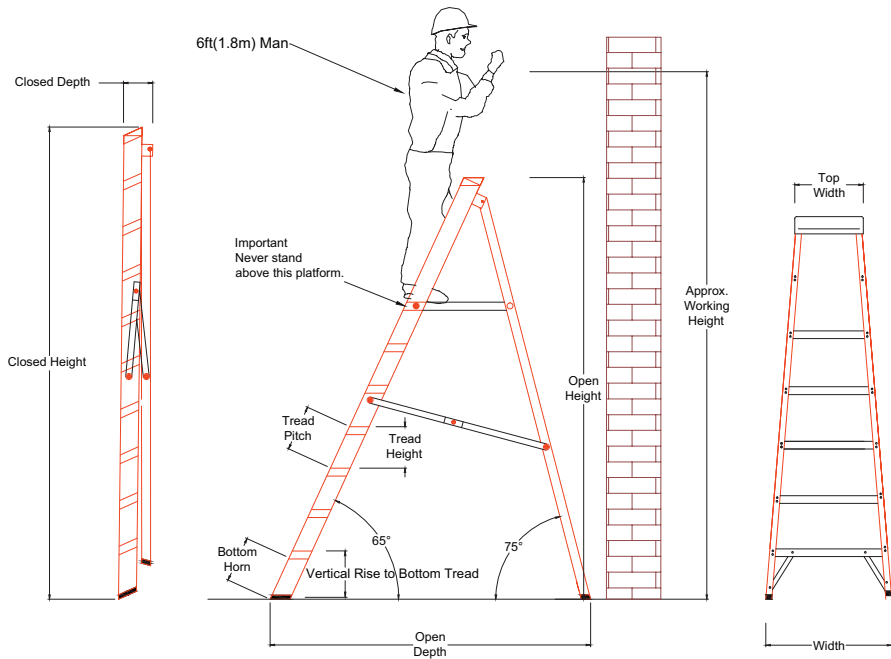

Product Dimensions

PRODUCT SKU	TREAD COUNT	APPROX. WORKING HEIGHT* (M)	PLATFORM HEIGHT (M)	OPEN HEIGHT (M)	CLOSED HEIGHT (M)	WIDTH (M)	OPEN DEPTH (M)	WEIGHT (NETT KG)
1236-004	4	2.5	0.9	1.5	1.7	0.5	1.0	9.0
1236-005	5	2.8	1.2	1.8	2.0	0.5	1.1	10.0
1236-006	6	3.0	1.4	2.0	2.2	0.6	1.3	11.0
1236-008	8	3.5	1.9	2.5	2.7	0.6	1.6	14.5
1236-010	10	3.9	2.3	2.9	3.2	0.7	1.9	18.0

- * Working height is calculated as 1,600mm plus the height of the platform or last climbing tread, whichever is appropriate.
- Tread count includes top platform step.

Technical Description

Our fibreglass stepladder range incorporates a multi-functional tool tray with non-conductive stiles, making them ideal for working around electricity. The combination of super-strong C-section fibreglass stiles and reinforced aluminium treads gives you a durable yet lightweight and easy to handle step that is perfect for the busy tradesman.

- » Non-conductive stiles insulated to 30,000 volts (EN61478), ideal for working around electricity
- » Integrated multi-function tool tray
- » Reinforced 330 x 250mm checker-plate platform (Platform steps only)
- » Comfortable 80mm treads
- » Hinged metal locking stays provide optimal stability
- » Large feet angled to maximise ground contact and reduce slip

Standards & Classification

- » Max Load 150kg
- » EN131

Warranty

- » 3 Years

Commodity Code

- » 70199000

Shipping Dimensions

PRODUCT SKU	SHIPPING LENGTH (MM)	SHIPPING WIDTH (MM)	SHIPPING DEPTH (MM)	SHIPPING VOLUME (M ³)	SHIPPING WEIGHT (GROSS KG)	BARCODE
1236-004	1,720	510	130	0.1140	9.0	5060169480223
1236-005	1,970	542	130	0.1388	10.0	5060169480230
1236-006	2,220	574	130	0.1657	11.0	5060169480247
1236-008	2,720	638	130	0.2256	14.5	5060169480261
1236-010	3,220	672	130	0.2813	18.0	5060169480285