


CADDY MACROFIX

Insulated M8/M10



- Return lip on the hanger prevents the rubber from detaching, eliminating rework during installation
- Plastic washer prevents screws from falling out during installation
- Combo head bolt works with slotted, hex, or phillips drivers
- Longer ears position the screw farther from the hanger, improving tool clearance when the screw is driven down
- Combination nut can be attached to M8 or M10 threaded rod, simplifying material handling
- Screws can expand hanger to work with a larger range of pipe sizes, reducing inventory

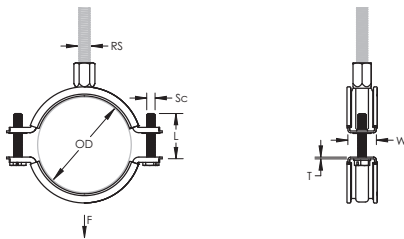

Material: EPDM-SBR Rubber, Steel

Finish: Electrogalvanized

Color: Black

Temperature: -50 to 110 °C

| Part Number | Article Number | Outer Diameter OD | Pipe Size | NB/DN | Rod Size RS | Width W | Thickness T | Screw Diameter Sc | Screw Length L | Static Load F |
|-------------|----------------|-------------------|-----------|-------|-------------|---------|-------------|-------------------|----------------|---------------|
| MFD015 | 586001 | 11 – 15 mm | 1/4" | 8 | M8, M10 | 20 mm | 1,00 mm | M6 | 17 mm | 1.000 N |
| MFD019 | 586002 | 15 – 19 mm | 3/8" | 10 | M8, M10 | 20 mm | 1,00 mm | M6 | 17 mm | 1.000 N |
| MFD025 | 586003 | 19 – 25 mm | 1/2" | 15 | M8, M10 | 20 mm | 1,00 mm | M6 | 22 mm | 1.000 N |
| MFD031 | 586004 | 25 – 31 mm | 3/4" | 20 | M8, M10 | 20 mm | 1,00 mm | M6 | 22 mm | 1.000 N |
| MFD037 | 586005 | 31 – 37 mm | 1" | 25 | M8, M10 | 20 mm | 1,00 mm | M6 | 22 mm | 1.000 N |
| MFD044 | 586006 | 37 – 44 mm | 1 1/4" | 32 | M8, M10 | 20 mm | 1,00 mm | M6 | 27 mm | 1.000 N |
| MFD050 | 586007 | 44 – 50 mm | 1 1/2" | 40 | M8, M10 | 20 mm | 1,25 mm | M6 | 27 mm | 1.500 N |
| MFD058 | 586008 | 50 – 58 mm | - | - | M8, M10 | 20 mm | 1,25 mm | M6 | 27 mm | 1.500 N |
| MFD068 | 586009 | 58 – 68 mm | 2" | 50 | M8, M10 | 20 mm | 1,25 mm | M6 | 32 mm | 1.500 N |
| MFD078 | 586010 | 68 – 78 mm | 2 1/2" | 65 | M8, M10 | 23 mm | 1,50 mm | M6 | 32 mm | 2.000 N |
| MFD088 | 586011 | 78 – 88 mm | - | - | M8, M10 | 23 mm | 1,50 mm | M6 | 32 mm | 2.000 N |
| MFD098 | 586012 | 88 – 98 mm | 3" | 80 | M8, M10 | 23 mm | 1,75 mm | M6 | 37 mm | 2.500 N |
| MFD108 | 586013 | 98 – 108 mm | 3 1/2" | 90 | M8, M10 | 23 mm | 1,75 mm | M6 | 37 mm | 2.500 N |
| MFD118 | 586014 | 108 – 118 mm | 4" | 100 | M8, M10 | 23 mm | 1,75 mm | M6 | 37 mm | 2.500 N |

| Part Number | Article Number | Outer Diameter OD | Pipe Size | NB/DN | Rod Size RS | Width W | Thickness T | Screw Diameter Sc | Screw Length L | Static Load F |
|-------------|----------------|-------------------|-----------|-------|-------------|---------|-------------|-------------------|----------------|---------------|
| MFD128 | 586015 | 118 - 128 mm | - | - | M8, M10 | 23 mm | 2,00 mm | M6 | 37 mm | 3.000 N |
| MFD138 | 586016 | 128 - 138 mm | - | - | M8, M10 | 23 mm | 2,00 mm | M6 | 37 mm | 3.000 N |