


Fuel & oils

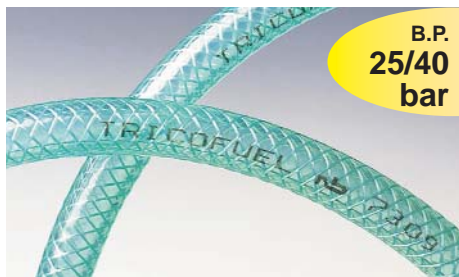


B.P.
25/40
bar

TRICOFUEL®

+60
°C
-15

Transparent hose for hydrocarbons

Three layer design, with two clear PVC layers sandwiched around a polyester fibre braiding.



- 1 Flexible clear green PVC outer coating hydrocarbons resistant
- 2 Fibre reinforcement
- 3 Smooth clear green PVC core

ALL FUEL LINES :

- For pumps, circulation pumps, burners, vine heaters
- For frost prevention, heating equipment...
- Transfer of certain chemical products : petrols, certain acids and certain bases, oils, alcohols...(not suitable for aromatic hydrocarbons)

ALL SECTORS OF ACTIVITY :

- Automotive industry, assembly plants, plastics industry, food production industry, construction
- Garages (for cars, lorries & agricultural machinery)
- Woodworking, etc...

Marking : TRICOFUEL  [batch number]

ADVANTAGES

The composition of Tricofuel hose material compound is designed specially for hydrocarbon transfer. Thus, it retains its flexibility, even after intensive use. It withstands repeated bending, whilst also offering excellent resistance to ageing. The clear aspect of both the core and the coating provides for easy visual control of fluids transfer.

CHEMICAL RESISTANCE

See table column B.

CONNECTORS

Band, worm drive, screw or 'O' ring clamps.
Swaged fittings can be used if they do not damage the hose.

| mm | ± mm | mm | ± mm | mm | g/m | Bar | mm | Green | | |
|-----|---------|------|---------|------|-----|-----|----|-------|--------|--------|
| | | | | | | | | 25 m | 50 m | |
| 6,3 | +/- 0,3 | 11 | +/- 0,3 | 2,35 | 81 | 40 | 13 | 44 | 050985 | 050998 |
| 8 | +/- 0,5 | 14 | +/- 0,5 | 3 | 129 | 40 | 13 | 56 | 051162 | 051175 |
| 10 | +/- 0,5 | 16 | +/- 0,5 | 3 | 152 | 30 | 10 | 70 | 051246 | 051259 |
| 12 | +/- 0,6 | 19 | +/- 0,6 | 3,5 | 211 | 30 | 10 | 84 | 051204 | 051217 |
| 15 | +/- 0,6 | 23 | +/- 0,6 | 4 | 297 | 30 | 10 | 105 | 052274 | |
| 20 | +/- 0,8 | 28 | +/- 0,8 | 4 | 373 | 30 | 10 | 140 | 052680 | 052693 |
| 25 | +/- 0,8 | 32,5 | +/- 0,8 | 3,75 | 420 | 25 | 8 | 175 | 050843 | 050856 |
| 30 | +/- 1,0 | 39 | +/- 1,0 | 4,5 | 603 | 25 | 8 | 210 | 052883 | |