


Angle Seat Piston Valves



Bronze Body Normally Open Version G 1/2" - G2" Oil, Air, Aggressive Media Steam - 9 barg max (180°C)

Wetted Materials Bronze CC419K EN 1982:2000
 Brass CW617 N EN 12165
 Stainless Steel
 PTFE (Main Seal)

Ambient Temperature -10 - +60°C
 Media Temperature -10 - +180°C
 Media Viscosity 600mm²/s max
 Actuator Polyamide PA6 (30% GF)
 Actuator Rotation 360°
 Vacuum (45mm Only) 10⁻² mbar max
 Flow Direction 2-1 (Under seat)

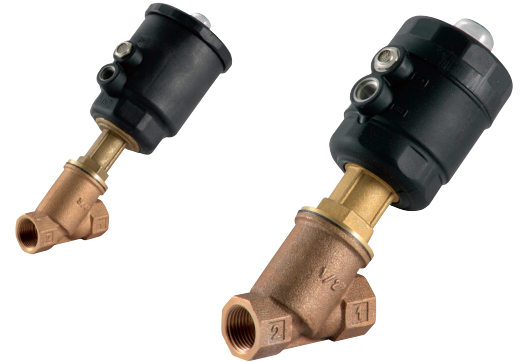


• 45mm actuator.
 Ambient Temperature: -10°C to +60°C
 Media Temperature: -10°C to +180°C

• 45mm actuator.
 Ambient Temperature: -10°C to +60°C
 Media Temperature: -10°C to +180°C

2/2 Normally Open

Connection	Part Number	Actuator Ø	Orifice	Operating Pressure Differential Barg		Pilot Pressure Bar (for OPD max) Refer to Charts		Flow (kv)	Weight
				Min	Max	Min	Max		
Inches		mm	mm					l/min	kg
G½	RCG205CTW00	45	15	Vacuum	16	4.0	10	98	0.8
G¾	RCG206CTX00	45	20	Vacuum	16	6.2	10	164	0.9
G1	RCG207CTY00	45	25	Vacuum	16	8.8	10	260	1.1
G½	RCG205STW00	63	15	0	16	2.5	10	98	1.2
G¾	RCG206STX00	63	20	0	16	4.3	10	164	1.3
G1	RCG207STY00	63	25	0	16	5.5	10	260	1.5
G1¼	RCG208STZ00	63	32	0	16	6.5	10	410	1.9
G1½	RCG209STK00	63	40	0	16	9	10	700	2.1
G2	RCG210STJ00	63	50	0	12	9.4	10	950	2.9

Direct Mount 3/2 Banjo Pilot Solenoid Valve— 45mm Actuator B356CVCMK + Voltage
 63mm Actuator B326CVCMK + Voltage

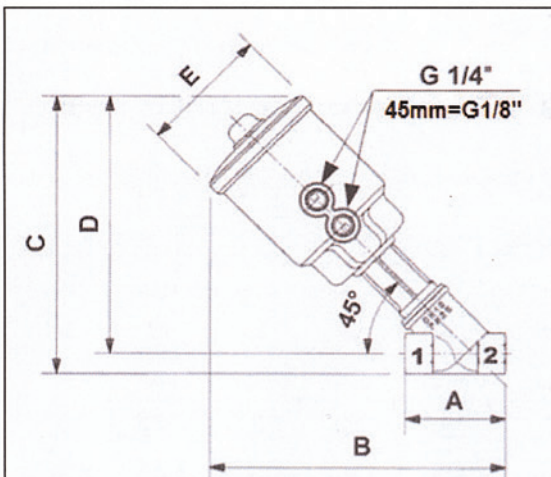

Dimensions

mm	Act'r	A	B	C	D	E
G½	45	65	144	136	123	57
G¾	45	75	149	142	126	57
G1	45	90	168	161	141	57
G½	63	65	192	184	171	85
G¾	63	75	198	192	176	85
G1	63	90	212	205	185	85
G1¼	63	110	225	217	193	85
G1½	63	120	230	225	198	85
G2	63	150	248	241	207	85